

Features & Benefits

- 💧 Low odour formulation
- 💧 Excellent adhesion on plastics, metals and composites
- 💧 15 minutes open time
- 💧 Outstanding strength on unprepared materials
- 💧 High toughness

Description

PERMABOND® TA4551 is a two-part, 2:1 low odour acrylic adhesive. It has been developed for the structural bonding of some nylon/polyamide grades without the need for any primers or additional surface treatments. TA4551 is also good for bonding plastics, composites and metals, and cures rapidly at room temperature, whilst being thixotropic (non-slump), allowing for vertical application.

The adhesive is highly toughened, making it suitable for applications involving impact and vibration.

Typical Physical Properties of Uncured Adhesive

	TA4551 A-side	TA4551 B-side
Chemical composition	Acrylic	Acrylic
Colour	Burgundy	Yellow
Viscosity @ 25°C	20,000 mPa.s (cP) Thixotropic	50,000 mPa.s (cP) Thixotropic
Specific gravity	1.0	1.0

Typical Curing Properties

Ratio of use	2:1
Minimum† / Maximum gap fill	0.1 mm (0.004 inch) 5 mm (0.2 inch)
Pot life (10g mix) @23°C	10-15 mins
Open time @23°C	15 mins
Working strength (0.3 N/mm ² shear is achieved) @23°C	2-3 hours
Full cure @ 23°C	24 hours

*Curing times on mild steel. †The adhesive incorporates microbeads, allowing for a controlled minimum gap.

The information given and the recommendations made herein are based on our research and are believed to be accurate, but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.


Typical Performance of Cured Adhesive

Shear strength† (ISO 4587)	PA6: 3-5 N/mm ² (440-580 psi) PA6,6: 3-5 N/mm ² (440-730 psi) PMMA: >4 N/mm ² (290-440 psi)* PVC: >4 N/mm ² (150-290 psi)* Polycarbonate: 3-4 N/mm ² (440-580 psi) Epoxy FRP: >14 N/mm ² (>2030 psi)* Carbon Fibre: 18-22 N/mm ² (2610-3190 psi) Stainless Steel: 30-32 N/mm ² (4350-4640 psi) Aluminium: 26-35 N/mm ² (5080-5370 psi) Aluminium: 23-27 N/mm ² (3340-3920 psi)** Mild Steel: 23-27 N/mm ² (3340-3920 psi) Galv steel: 15-17 N/mm ² (2180-2470 psi)**
Peel strength (aluminium) (ISO 4578)	308 N/25mm (70 PIW)
Impact strength (ASTM D-950)	66 KJ/cm ²
Hardness (ISO 868)	65 Shore D
Tg (DMA)	65°C
Tensile strength (ASTM D638)	14 MPa
Elongation at break (ASTM D-638)	100%
E-modulus (ASTM D638)	350 MPa
Water absorption (24h at 25°C)	0.7%

*Substrate failure was observed. **Unprepared.


†Nature of surface, surface preparation, glue-line thickness, thickness of substrates, pull speed, batch variation, cure time and temperature will all affect the shear strength measurement.

Strength Development

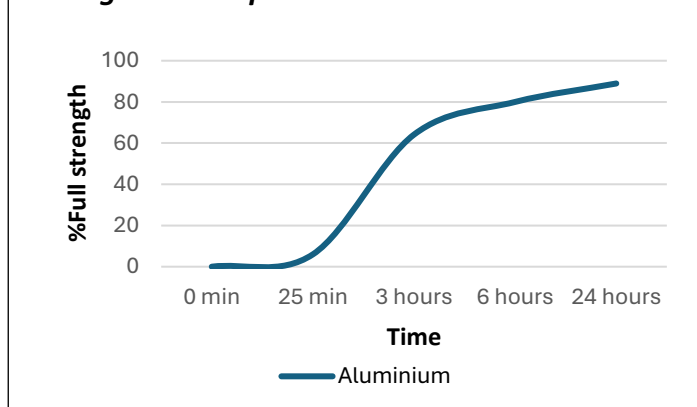

Graph shows typical strength development at 23°C. Curing at higher or lower temperatures may affect cure speed.

Hot Strength

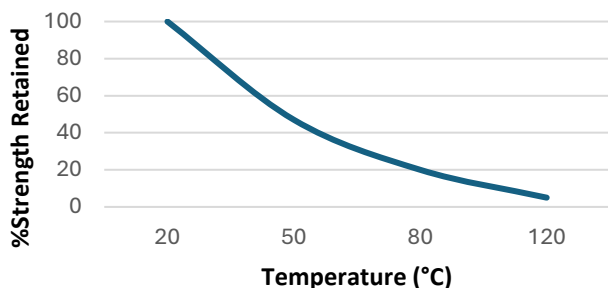

***"Hot strength" shear strength tests performed on aluminium. 24-hour cure at room-temperature and conditioned for 30 minutes before testing.*

Permabond® TA4551 can withstand higher temperatures for brief periods (such as for paint-baking and wave-soldering processes) provided the joint is not unduly stressed.

Chemical Resistance

Lap shear specimens aged and tested at room temperature		
Environment	500h	1000h
85°C/85% RH	Aluminium 100%	Aluminium 86%
IPA @+25°C	Aluminium 71%	Aluminium 62%
Gasoline @+25°C	Aluminium 103%	Aluminium 92%
Motor Oil @+25°C	Aluminium 88%	Aluminium 96%

Additional Information

This product is not recommended for use in contact with strongly oxidizing materials. Information regarding the safe handling of this material may be obtained from the Safety Datasheet. Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

Video Links

Surface preparation:

<https://youtu.be/8CMOMP7hXjU>

Structural acrylic directions for use:

<https://youtu.be/j4Ou9acBtmc>



Storage & Handling

Storage Temperature	12 to 25°C (41 to 77°F)
---------------------	-------------------------

Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Surfaces may have traces of mould release-agent present – wipe with isopropanol (IPA) solvent and allow to fully evaporate before bonding.

If bonding to metal: some metals such as aluminium, copper and its alloys will benefit from light abrasion with an emery cloth (or similar) to remove the oxide layer.

Directions for Use

- 1) Surfaces must be clean, dry and grease-free prior to bonding.
- 2) Apply a thin bead of adhesive pre-mixed through a static mixer nozzle.
- 3) Assemble components and clamp.
- 4) Maintain pressure until handling strength is achieved. The time required will vary according to the joint design and surfaces being bonded.
- 5) Allow 24 hours for adhesive to fully cure.

NB: Adhesive outside of a closed joint (i.e. excess material) will cure more slowly and may feel soft due to air contact. Adhesive inside the joint will cure solid.

This Technical Datasheet (TDS) offers guideline information and does not constitute a specification.

www.permabond.com

• UK: 0800 975 9800

• General Enquiries: +44 (0)1962 711661

• US: 732-868-1372

• Asia: + 86 21 5773 4913

info.europe@permabond.com

info.americas@permabond.com

info.asia@permabond.com

The information given and the recommendations made herein are based on our research and are believed to be accurate, but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care® program.